MONITORING SPEAKERS

MONITORING SPEAKERS

Overview

aktiv 05		Top Quality 5" Studio Reference Monitor	Page 3
unik 05+		Professional Active Reference 5" Studio Monitor	Page 10
unik 08+		Professional Active Reference 8" Studio Monitor	Page 17
aktiv 10s		Powered Studio Monitoring Subwoofer	Page 24

ESI
ESI

aktiv 05

Top Quality 5" Studio Reference Monitor

aktiv 05

The aktiv 05 near field reference monitors take professional level 5” near field monitoring speakers for the entry level to yet another level.

This product proves that you do not have to spend a lot of money on high-quality studio equipment. So beginners or producers on a budget can get started right away.

aktiv 05

Target group:

- Producers (home studio, project studio, video or multimedia applications)
- Suitable for beginners & semi-pros

Benefits:

- 5" kevlar curved cone
- Durability

USP:

Price / Quality

aktiv 05

Pioneers

ESI reinvented the home studio market by being the 1st vendor using kevlar as material for low frequency drivers in this price segment.

Silk dome HF

1" silk dome tweeter as HF driver provides a clear and accurate sound.

Clearly arranged rear

The design of the back is simple and easy to understand.

Therefore this speaker is perfect for to start recording, mastering and mixing.

aktiv 05

Reviews

RECORDING

"(...) you won't often get so much sound for your money." / "A honest impulse stable sound with a proper resolution of the spectrum speaks for ESI monitors."

bonedo

"transparent sound" / "very good price/value"

KEYS

"In their price range, the ESI aktiv near field monitors can be considered among the best."

aktiv 05

Features

- 2-way powered speaker / active studio monitor speaker
- 5" kevlar curved cone (magnetic shielding type) as LF driver
- 1" silk dome tweeter as HF driver
- output power 60W (HF 30W, LF 30W), 85W AC consumption power
- magnetically shielded for desktop operation
- input connections: XLR / TS1/4" combo connector, balanced / unbalanced input
- input impedance: 23.3 kOhm balanced, 13.3 kOhm unbalanced
- input sensitivity: 75mV@1Watt, 415mV@30Watt
- frequency response: 50Hz - 20kHz
- crossover frequency: 2.5 kHz
- SPL: 88dB +/- 3dB
- operating voltage: AC100-240V 50/60Hz, with 115V / 230V AC selection switch
- blue power LED on the front
- standby function, can be turned on and off (only models sold in certain countries)
- dimensions: 250mm (H) x 176mm (W) x 200mm (D)
- weight: ca. 4.5kg

ESI
ESI

unik 05+

Professional Active Reference 5"
Studio Monitor

uniK 05+

uniK 05+ is ideal for producing music in small to medium-sized rooms.

This active reference studio monitor can be optimally adapted to numerous room conditions, thanks to comprehensive configuration options on the rear.

This product impresses with its ritch bass sound and the unique magnetostatic tweeter.

unik 05+

Target group:

- Professional and semi-professional users
- Producers
- Sound engineers

Benefits:

- Long and effortless listening pleasure due to the magnetostatic tweeter, providing a stress-free and silky sound
- The 5” kevlar curved cone is both lightweight and stable, ensuring optimal impulse response

USP:

- Very high quality for surprisingly little money

uniK 05+

Rubber Feet

uniK 05+ come with 4 screw-on rubber feet. They help to reduce unwanted vibrations and to isolate the speakers.

Furthermore they are height-adjustable, so you can tilt them up and down until you find the perfect position.

Bass Port Plug

For big ideas in small rooms: When the speakers have to be placed near to the wall, those plugs can be used to avoid unwanted reflections.

Room Adjustments

Unique in this price range: Gain and sound characteristics can be adjusted with the controls on the back, using the included little screwdriver.

Standby Possible

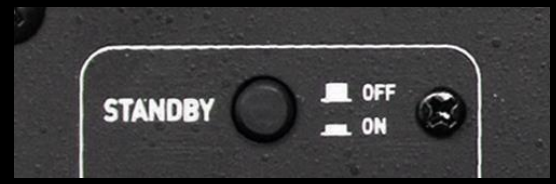

With the standby function, ESI complies with a legal EU requirement designed to help users save money on electricity. However, it can be deactivated by pressing the switch on the back.

uniK 05+

Reviews

RecMag

"Soundwise, uniK 05+ convince especially with their powerful bass and ear-friendly essence." / "At reasonable cost, ESI delivers good monitors ..."

KEYS

"well tuned frequency response with tight base response and clear transients" / "many practical features"

Analogwa Dusza

"... it defines a new level of quality in its class"

unik 05+

Features

- Biamp 2-Way Powered Speaker System
- Active Studio Monitor Speaker
- HF Driver: extremely low mass magnetostactic tweeter Φ49 x 26 mm
- LF Driver: 5" kevlar curved cone (magnetic shielding type)
- Output Power: 80W (HF: 40W, LF: 40W), 110W AC consumption power
- Frequency Response: 49Hz - 25kHz
- Input Impedance: 27.2kOhm (balanced) / 13.6kOhm (unbalanced)
- Crossover Point: 3.2kHz
- SPL: 101dB, Peak 104dB
- Input Connectors: XLR / TRS 1/4" combo connector, balanced / unbalanced
- Gain Control: -14 .. 0dB .. +14
- Room Adjustments Control: Character: -6 .. 0dB .. +6; Low: -5 .. 0dB .. +5; High: -5 .. 0dB .. +5
- Rear Bass-Reflex ventilation, optimized for near field application
- Ground lift switch
- Standby function, can be turned on and off
- Indicator: multi color LED on front panel, power on orange, standby red
- Feet: 4 pieces rubberized, adjustable height separately
- Working Voltage: AC100-240V 50/60Hz
- Dimensions (W x H x D): 190 x 265 x 210mm
- Weight: 4.4 kg

ESI
ESI

unik 08+

Professional Active Reference 8"
Studio Monitor

uniK 08+

uniK 08+ is ideal for producing music in medium-sized to large rooms with consistently high quality.

This active reference studio monitor can be optimally adapted to numerous room conditions, thanks to comprehensive configuration options on the rear.

This product impresses with its ritch bass sound and the unique magnetostatic tweeter.

unik 08+

Target group:

- Professional and semi-professional users
- Producers
- Sound engineers

Benefits:

- Long and effortless listening pleasure due to the magnetostatic tweeter, providing a stress-free and silky sound
- The 8” kevlar curved cone is both lightweight and stable, ensuring optimal impulse response

USP:

- Very high quality for surprisingly little money

uniK 08+

Rubber Feet

uniK 08+ come with 4 screw-on rubber feet. They help to reduce unwanted vibrations and to isolate the speakers.

Furthermore they are height-adjustable, so you can tilt them up and down until you find the perfect position.

Bass Port Plug

When the speakers have to be placed near to the wall, those plugs can be used to avoid unwanted reflections.

Room Adjustments

Unique in this price range: Gain and sound characteristics can be adjusted with the controls on the back, using the included little screwdriver.

Standby Possible

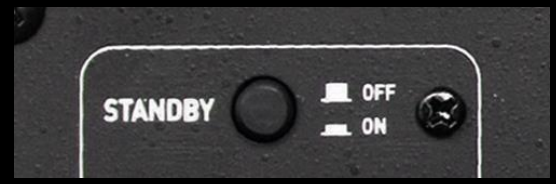

With the standby function, ESI complies with a legal EU requirement designed to help users save money on electricity. However, it can be deactivated by pressing the switch on the back.

uniK 08+

Reviews

Amazona

"They sounds rich and comfortable, and have a lot of power in addition" / "good detail solutions" / "very well built" / "affordable for the features"

RECORDING

"ESI's uniK Plus speakers stand proudly (...) They have their own character, and it's one that I happen to trust." / "The clarity and sweetness of a flat-ribbon tweeter married to the controlled and 3-dimensional power of a properly powered woofer."

CUONET

"It's a good price for an 8-inch monitoring speaker [...] The sound is really good."

unik 08+

Features

- Biamp 2-Way Powered Speaker System
- Active Studio Monitor Speaker
- HF Driver: extremely low mass magnetostactic tweeter Φ49 x 26 mm
- LF Driver: 8" kevlar curved cone (magnetic shielding type)
- Output Power: 140W (HF: 70W, LF: 70W), 160W AC consumption power
- Frequency Response: 37Hz - 25kHz
- Input Impedance: 27.2kOhm (balanced) / 13.6kOhm (unbalanced)
- Crossover Point: 3.2kHz
- SPL: 105dB, Peak 108dB
- Input Connectors: XLR / TRS 1/4" combo connector, balanced / unbalanced
- Gain Control: -14 .. 0dB .. +14
- Room Adjustments Control: Character: -6 .. 0dB .. +6; Low: -5 .. 0dB .. +5; High: -5 .. 0dB .. +5
- Rear Bass-Reflex ventilation, optimized for near field application
- Ground lift switch
- Standby function: can be turned on and off
- Indicator: multi color LED on front panel, power on orange, standby red
- Feet: 4 pieces rubberized, adjustable height separately
- Working Voltage: AC100-240V 50/60Hz
- Dimensions (W x H x D): 252 x 352 x 319mm
- Weight: 8.1 kg

aktiv 10s

Powered Studio Monitoring Subwoofer

aktiv10s

aktiv10s delivers precise, well-defined bass.

This subwoofer will enrich your monitor setup and boost the lower frequencies in your mix.

Suitable for classical 2.1 sound and for 5.1 / 7.1 surround sound applications.

aktiv 10s

Target group:

- Producers (recording studio, home studio, project studio)

Benefits:

- Foot switch input for muting
- Ideal for mixing and mastering as it allows you to tune in to the low frequencies and ensure that they hit where they belong.
- The 150W subwoofer has input level control, phase control and balanced XLR inputs and outputs.

USP:

- Price / Quality

aktiv 10s

Features

- 10" bass reflex powered subwoofer
- amplifier power: 150W@100Hz, 4 Ohm, 0.1% THD
- subwoofer crossover frequency: 50Hz - 180Hz (adjustable)
- separate satellite output crossover frequency: @100Hz and flat (adjustable)
- phase control
- input level control
- power mode: standby and on
- inputs: balanced XLR, unbalanced 1/4" TRS
- outputs: balanced XLR
- input impedance: 20kOhm balanced, 10kOhm unbalanced
- foot switch input as mute control
- dimensions: 340mm(H) x 340mm(W) x 340mm(D)
- weight: 14 kg